

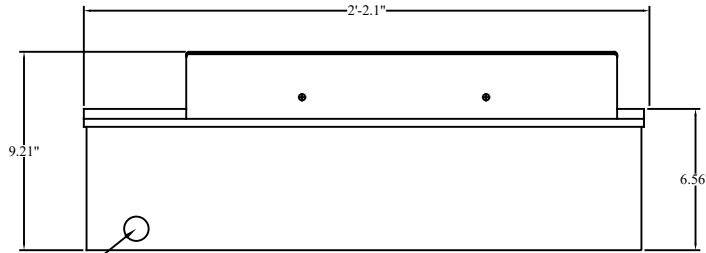


Specifications

Housing Material: Powder Coated Galvanized Steel (-SS for Stainless Steel Housing Option)
Input Power: 120 VAC 60 Hz.
Power Consumption: 28 Va.
Total UV Output: 10 UVC Watts @ 254 nm
Number of Lamps: 1 - 22" UVC (AS-IH-1015, No Ozone production)
Electrical Connections: Multiple 1/2" & 3/4" Knockouts

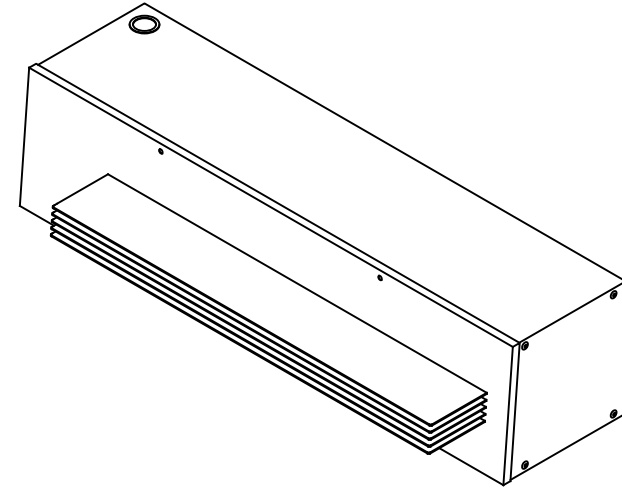


Electrical Connections

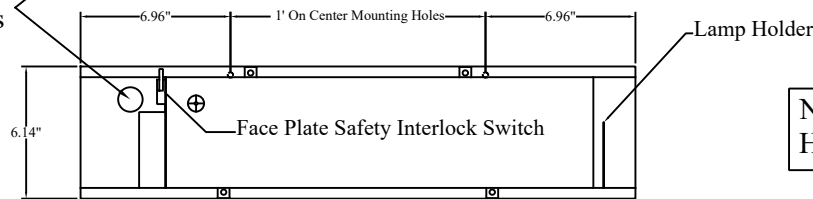



Note: Minimum Installation Height of 7' to Bottom of Fixture

Lamp Reflector


22" UVC Lamp



Directional UV Fins

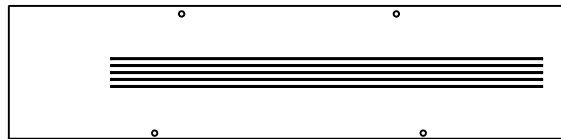

Face Plate Pitch for Occupant Safety

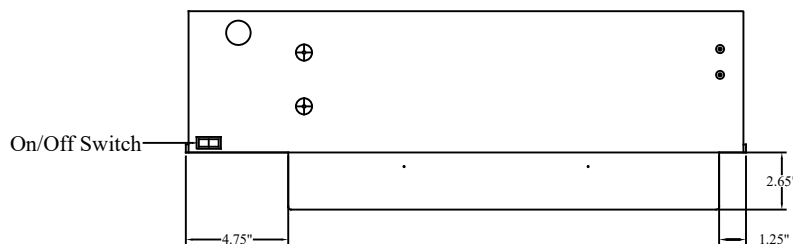

On/Off Switch

Ultravation, Inc.

212 Ideal Way.
 Poultney, Vermont 05764.
 Ph: 802-287-9735
 Fx: 802-287-9203
www.Ultravation.com

Part #: UVMMatrix FS-22	Drawing #: FS22-DSS	Rev - C
Description: BioGard Series UVMMatrix FS-22 Upper Room UVC, 1- 22" Germicidal Lamp with Area Coverage of 225 ft ² at maximum dimensions of 15' Wide x 15' Deep		
Date: 1/5/21	Scale:	Creator: JSM