

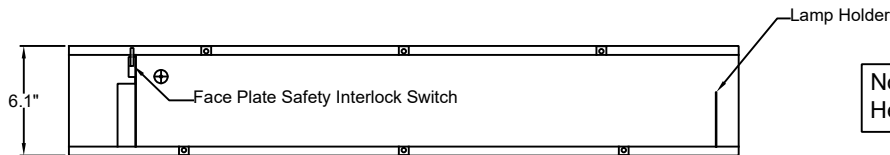
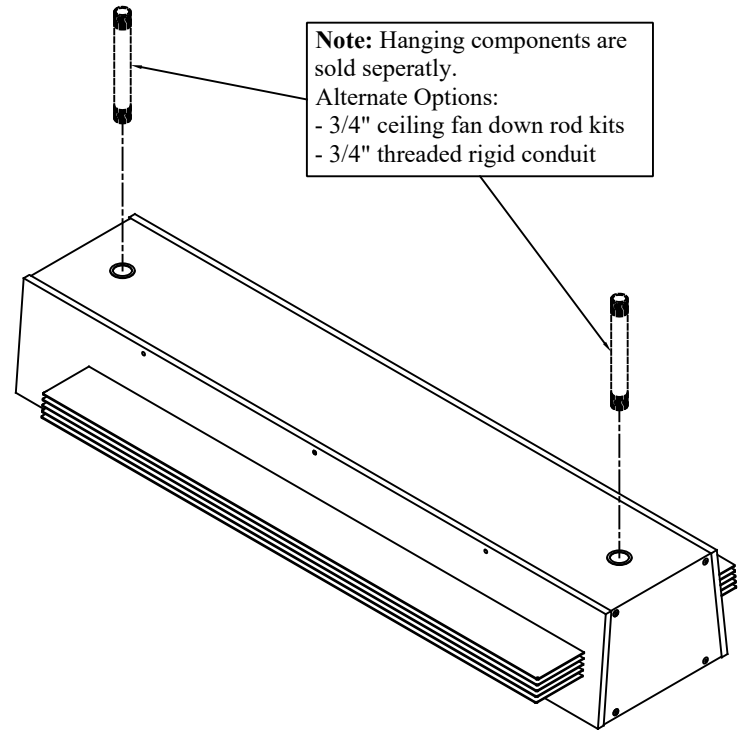
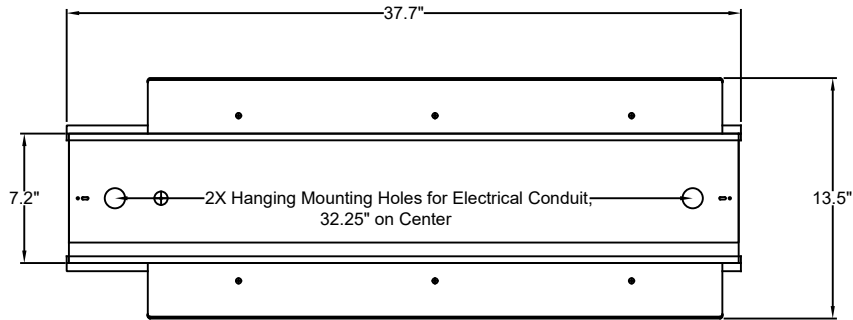


Specifications

Housing Material: Powder Coated Galvanized Steel
Input Power: 120 VAC 60 HZ.
Power Consumption: 36 Va.
Total UV Output: 16 UVC Watts @ 254 nm
Number of Lamps: 1 - 33" UVC (AS-IH-0614, No Ozone production)
Electrical Connections: Multiple 1/2" & 3/4" Knockouts

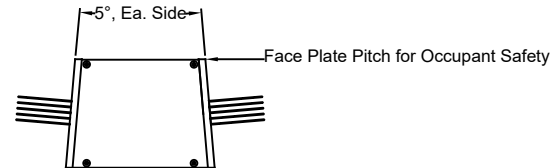

Note: Minimum Installation Height of 7' to Bottom of Fixture



Ultravation, Inc.

212 Ideal Way.
Poultney, Vermont 05764.
Ph: 802-287-9735
Fx: 802-287-9203
www.Ultravation.com

Part #: UVMatrix FS-33-CR	Drawing #: FS33CR-DSS	Rev - B
Description: BioGard Series UVMatrix FS-33-CR Upper Room UVC, Center of room installation with 1- 33" Germicidal Lamp with Area Coverage of 700 ft ² at maximum dimensions of 16' Wide x 44' Deep		
Date: 1/5/21	Scale:	Creator: JSM