

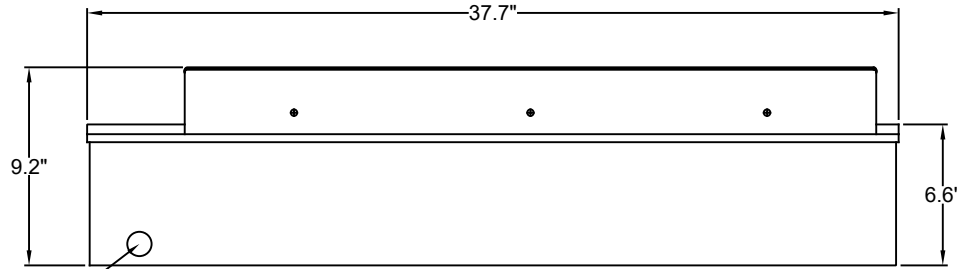


Specifications

Housing Material: Powder Coated Galvanized Steel
Input Power: 120 VAC 60 Hz.
Power Consumption: 44.5 Va.
Total UV Output: 16 UVC Watts @ 254 nm
Number of Lamps: 1 - 33" UVC (AS-IH-0614, No Ozone production)
Electrical Connections: Multiple 1/2" & 3/4" Knockouts
Air Flow: 67 CFM
Noise Level: 34.00 dB Fan

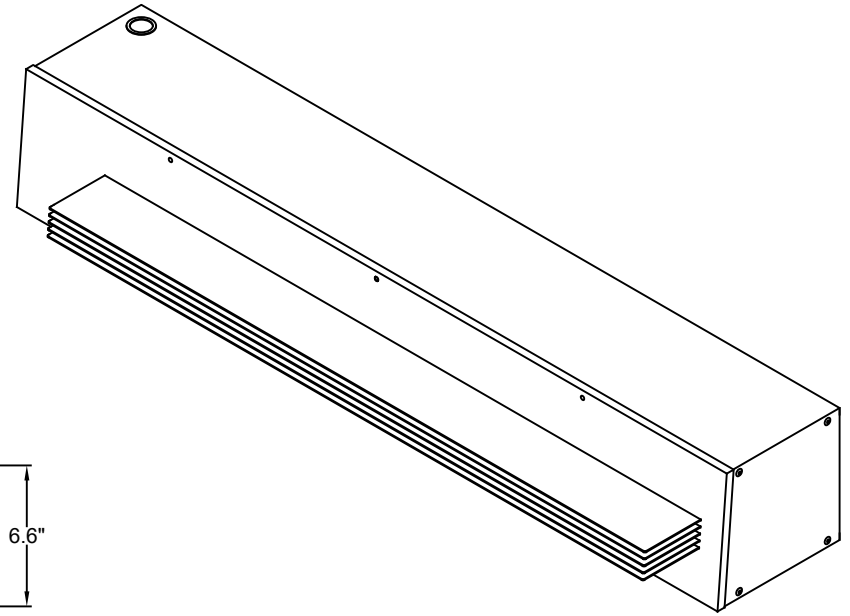


Electrical Connections

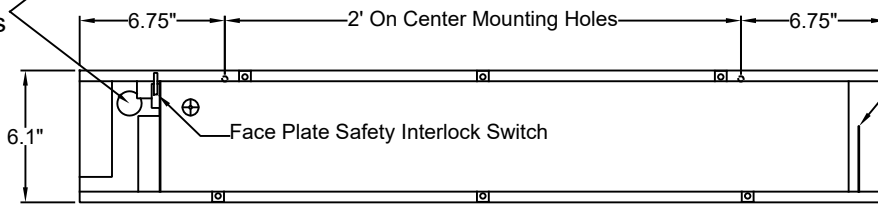

Lamp Holder

Note: Minimum Installation Height of 7' to Bottom of Fixture


67 CFM Circulating Fan



33" UVC Lamp




Lamp Reflector



Face Plate Pitch for Occupant Safety

Directional UV Fins

On/Off Switch

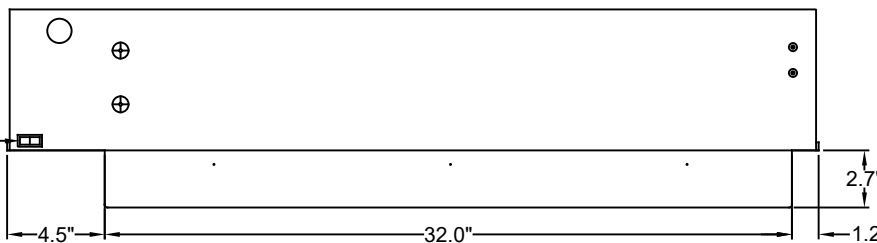

Ultravation, Inc.

212 Ideal Way.
 Poultney, Vermont 05764.
 Ph: 802-287-9735
 Fx: 802-287-9203
 www.Ultravation.com

Part #UVMatrix FS-33F | Drawing #: FS33F-DSS | Rev - C

Description: BioGard Series UVMatrix FS-33F Upper Room UVC with 67 CFM fan for increased room circulation, Wall Mount installation with 1-33" Germicidal Lamp for Area Coverage of 350 ft² at maximum dimensions of 16' wide x 22' deep.

Date: 1/5/21

Scale:

Creator: JSM